



AWWA C900/IB PVC Pressure Pipe | Gasketed Integral Bell

NAPCO's AWWA C900 Gasketed Integral Bell PVC Pipe product line is manufactured to meet the needs of modern municipal water, wastewater, and reclaimed water systems. With top quality raw materials and modern processing technology, our C900 pipe meets all industry standards in addition to our own rigorous quality control requirements.

Our C900 pipe utilizes Rieber style gaskets throughout the entire product offering to create a leak-free joint.



Short Form Specification											
Pipe Standard:	AWWA C900-16										
Diameter Std.:	Cast Iron Outside Diameter (CIOD)										
Nominal Sizes:	4", 6", 8", 10", 12", 14", 16", 18", 20", 24", 30", 36"										
Dimension Ratios & Pressure Ratings"	<table border="0"> <tr> <td>DR 51 – 80 psi</td> <td>DR 18 – 235 psi (185 psi)**</td> </tr> <tr> <td>DR 41 – 100 psi</td> <td>DR 14 – 305 psi (250 psi)**</td> </tr> <tr> <td>DR 32.5 – 125 psi</td> <td></td> </tr> <tr> <td>DR 25 – 165 psi</td> <td></td> </tr> <tr> <td>DR 21 – 200 psi</td> <td></td> </tr> </table>	DR 51 – 80 psi	DR 18 – 235 psi (185 psi)**	DR 41 – 100 psi	DR 14 – 305 psi (250 psi)**	DR 32.5 – 125 psi		DR 25 – 165 psi		DR 21 – 200 psi	
DR 51 – 80 psi	DR 18 – 235 psi (185 psi)**										
DR 41 – 100 psi	DR 14 – 305 psi (250 psi)**										
DR 32.5 – 125 psi											
DR 25 – 165 psi											
DR 21 – 200 psi											
Lay Length:	20' [6.1m]										
Pipe Compound:	ASTM D1784 Cell Class 12454										
Pipe Joint Std.:	ASTM D3139										
Max. Angular Joint Deflection:‡	1°										
Gasket Standard:	ASTM F477, UL 157										
Gasket Material Offerings:	Standard – SBR Optional – NBR or EPDM										
Installation Std.:	AWWA C605										


Applications	Potable Water	Wastewater	Reclaimed Water
Color:	Blue	Green	Purple
Certifications:*	NSF 14 NSF 61 CSA B137.3 UL 1285 FM 1612**	CSA B137.3	CSA B137.3

*See Certification Letter for full explanation and list of exceptions.
 **FM 1612 calculates pressure ratings differently than AWWA for 4"-12" only with DR 18 as 185 psi and DR 14 as 250 psi.
 ‡See Installation Guide for more information.





AWWA C900/IB PVC Pressure Pipe | Gasketed Integral Bell

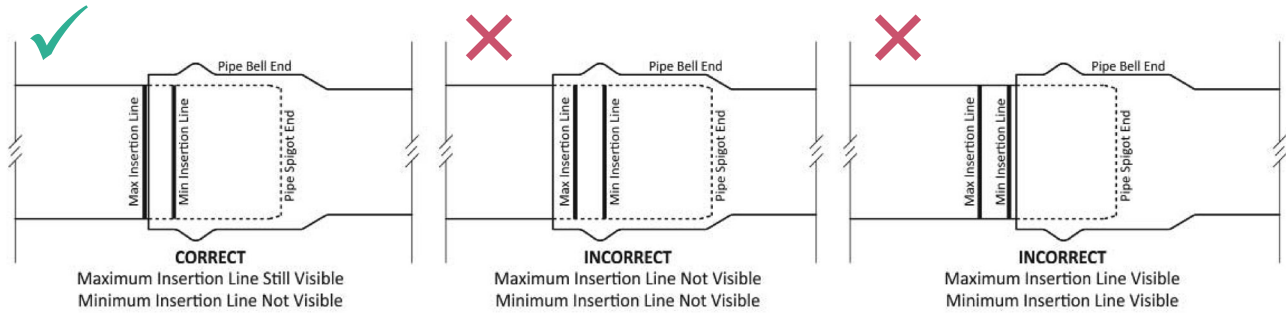

C900/IB PIPE DIMENSIONS & PERFORMANCE									
Nom. Size	Outside Diameter (OD)	DR	Pressure Class psi [kPa]	Min. Wall Thickness (T)	Internal Diameter (ID)	Approx. Bell Diameter (BD)	Bell Depth (C)	1 st Insertion Mark (L1)	2 nd Insertion Mark (L2)
4"	4.800	25	165	0.192	4.416	6.250	5.000	3.375	4.375
		18	235	0.267	4.266				
		14	305	0.343	4.114				
6"	6.900	25	165	0.276	6.348	8.625	5.750	4.625	5.625
		18	235	0.383	6.134				
		14	305	0.493	5.914				
8"	9.050	25	165	0.362	8.326	11.500	7.000	5.625	6.625
		18	235	0.503	8.044				
		14	305	0.646	7.758				
10"	11.100	25	165	0.444	10.212	14.000	7.250	6.125	7.125
		18	235	0.617	9.866				
		14	305	0.793	9.514				
12"	13.200	25	165	0.528	12.144	16.563	8.000	6.875	7.875
		18	235	0.733	11.734				
		14	305	0.943	11.314				
14" [350mm]	15.300 [388.6]	32.5	125 [860]	0.471 [12.0]	14.358 [364.7]	19.063 [484.2]	9.000 [228.6]	7.500 [190.5]	8.500 [215.9]
		25	165 [1150]	0.612 [15.6]	14.076 [357.5]				
		21	200	0.729	13.842				
		18	235 [1620]	0.850 [21.6]	13.600 [345.4]				
		14	305	1.093	13.114				
16" [400mm]	17.400 [442.0]	41	100	0.424	16.552	21.750 [552.5]	10.000 [254.0]	8.500 [215.9]	9.500 [241.3]
		32.5	125 [860]	0.535 [13.6]	16.330 [414.8]				
		25	165 [1150]	0.696 [17.7]	16.008 [406.6]				
		21	200	0.829	15.742				
		18	235 [1620]	0.967 [24.6]	15.466 [392.8]				
		14	305	1.243	14.914				



AWWA C900/IB PVC Pressure Pipe | Gasketed Integral Bell

C900/IB PIPE DIMENSIONS & PERFORMANCE									
Nom. Size	Outside Diameter (OD)	DR	Pressure Class psi [kPa]	Min. Wall Thickness (T)	Internal Diameter (ID)	Approx. Bell Diameter (BD)	Bell Depth (C)	1 st Insertion Mark (L1)	2 nd Insertion Mark (L2)
18" [450mm]	19.500 [459.3]	41	100	0.476	18.548	23.563 [598.5]	10.375 [263.5]	8.875 [225.4]	9.875 [250.8]
		32.5	125 [860]	0.600 [15.2]	18.300 [464.8]				
		25	165 [1150]	0.780 [19.8]	17.940 [455.7]				
		21	200	0.929	17.642				
		18	235 [1620]	1.083 [27.5]	17.334 [440.3]				
20" [500mm]	21.600 [548.6]	32.5	125 [860]	0.665 [16.9]	20.270 [514.9]	26.063 [662.0]	11.000 [279.4]	9.500 [241.3]	10.500 [266.7]
		25	165 [1150]	0.864 [22.0]	19.872 [504.7]				
		21	200	1.029	19.542				
		18	235 [1620]	1.200 [30.5]	19.200 [487.7]				
24" [600mm]	25.800 [655.3]	41	100	0.629	24.542	31.063 [789.0]	13.000 [330.2]	11.500 [292.1]	12.500 [317.5]
		32.5	125 [860]	0.794 [20.2]	24.212 [615.0]				
		25	165 [1150]	1.032 [26.2]	23.736 [602.9]				
		21	200	1.229	23.342				
		18	235 [1620]	1.433 [36.4]	22.934 [582.5]				
30"	32.000	51	80	0.627	30.746	37.500	15.125	13.625	14.625
		41	100	0.780	30.440				
		32.5	125	0.985	30.030				
		25	165	1.280	29.440				
		21	200	1.524	28.952				
36"	38.300	51	80	0.751	36.798	44.500	19.125	17.625	18.625
		41	100	0.934	36.432				
		32.5	125	1.178	35.944				
		25	165	1.532	35.236				
		21	200	1.824	34.652				

Notes:

1. These dimensions are for estimating purposes only. All dimensions not in brackets are in inches unless otherwise specified.
2. Products certified to CSA B137.3 have dimensions in brackets in millimeters unless otherwise specified.
3. DR = Dimension Ratio
4. AWWA and CSA Pressure Class @ 73°F [23°C] which includes a 2:1 safety factor.
5. Internal diameter calculated using nominal outside diameter and minimum wall thickness.
6. Dimension given for Approx. Bell Diameter (BD) is for highest pressure class.