


# Resilient Seated Gate Valve DIN3352 - F4

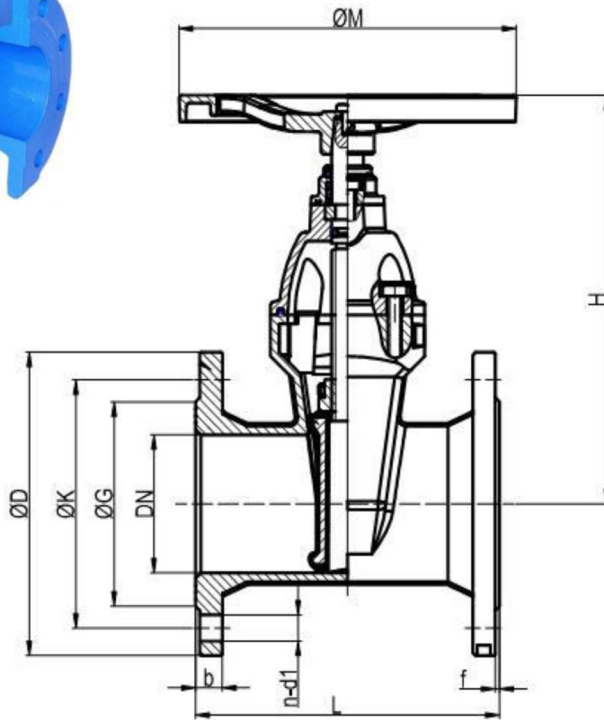

## Specifications

- \* Design: EN1171 EN1074-2
- \* Face to Face: DIN3352-F4
- \* End Flange: EN1092-2
- \* Tests: EN12266
- \* Working Temp: 0~80°C
- \* Nominal Pressure: PN10/PN16
- \* Coating: Fusion bond epoxy

## Material List

No.	Part Name	Material
1	Body	Ductile iron
2	Bonnet	Ductile iron
3	Disc	Ductile iron + EPDM
4	Stem Nut	Brass
5	Stem	X20Cr13 / SS420
6	Handwheel	Ductile iron
7	Rubber Parts	NBR / EPDM

DN	OUTLINE mm				END FLANGE PN 10/16 mm								
	L	H	ØM	h1	D	K	n-d1		b	G	f		
40	140	191	200	345	150	110	4-Ø19		19	84	3		
50	150	214	200	350	165	125	4-Ø19		19	99	3		
65	170	237	200	370	185	145	4-Ø19		19	118	3		
80	180	265	254	405	200	160	8-Ø19		19	132	3		
100	190	311	254	411	220	180	8-Ø19		19	156	3		
125	200	348	315	500	250	210	8-Ø19		19	184	3		
150	210	385	315	555	285	240	8-Ø23		19	211	3		
200	230	488	315	650	340	295	8-Ø23	12-Ø23	20	266	3		
250	250	600	406	750	395	405	350	355	12-Ø23	12-Ø28	22	319	3
300	270	680	406	855	445	460	400	410	12-Ø23	12-Ø28	24.5	370	4
350	290	810	500	950	505	520	460	470	16-Ø23	16-Ø31	24.5 26.5	429	4
400	310	890	500	1060	565	580	515	525	16-Ø28	16-Ø31	24.5 28	480	4
450	330	1010	630	1200	615	640	565	585	20-Ø28	20-Ø31	25.5 30	530 548	4
500	350	1234	630	1300	670	715	620	650	20-Ø28	20-Ø34	26.5 31.5	582 609	4
600	390	1260	630	1470	780	840	725	770	20-Ø31	20-Ø37	30 36	682 720	5
700	430	2150			895	910	840		24-Ø31	24-Ø37	32.5 39.5	794	5
800	470	2150			1015	1025	950		24-Ø33	24-Ø39	35 43	901	5
1000	550	2250			1230	1255	1160	1170	28-Ø37	28-Ø44	40 50	1112	5